

HDMI / DVI to Component / VGA & Audio Converter

User's Guide



Models

C- HDMI-COMPVGA

© 2008 **Avenview Inc.** All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

Reproduction of this manual, or parts thereof, in any form, without the express written permission of Avenview Inc. is strictly prohibited.

Table of Contents

Section 1: Getting Started	3
1.1 Important Safeguards	3
1.2 Safety Instructions	3
1.3 Regulatory Notices Federal Communications Commission (FCC)	4
1.4 Introduction	4
1.5 Package Contents.....	4
1.6 Before Installation.....	4
1.7 Panel Description	5
1.8 Installation	6
1.9 General Troubleshooting	7
Section 2: Specifications.....	7
2.1 Supported Resolutions.....	8
2.1.1 VGA Resolution	8
2.1.2 Component Video (YPbPr).....	8

Section 1: Getting Started

1.1 Important Safeguards

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
 - Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
 - Repair or attempted repair by anyone not authorized by us.
 - Any damage of the product due to shipment.
 - Removal or installation of the product.
 - Causes external to the product, such as electric power fluctuation or failure.
 - Use of supplies or parts not meeting our specifications.
 - Normal wear and tear.
 - Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

1.2 Safety Instructions

The C-HDMI-COMPVGA, HDMI / DVI to Component / VGA with Audio Converter has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the C-HDMI-COMPVGA should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Do not dismantle the housing or modify the module.
- Dismantling the housing or modifying the module may result in electrical shock or burn.
- Refer all servicing to qualified service personnel.
- Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Have the module checked by a qualified service engineer before using it again.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

1.3 Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment.

1.4 Introduction

Avenview C-HDMI-COMPVGA HDMI / DVI to Component / VGA with Audio Converter provides an easy and instant approach for converting digital HDMI and/or digital DVI video signal to Component or VGA with digital S/PDIF or analog stereo audio. With C-HDMI-COMPVGA converter, HDMI and/or DVI based devices such as DVD players, PS3, camcorders, set-top-boxes or PC can connect to Component or VGA TV or projector at low cost. The embedded HDMI / DVI selector switches between HDMI and DVI input sources.

- HDMI 1.2 compatible
- HDMI video input supports up to 1080p resolution
- Supports HD (1080i / 720p) component video output
- Supports up to UXGA PC video output
- Coaxial S/PDIF audio input
- Stereo analog audio input
- Front panel LED indicators and push button for switch between DVI or HDMI sources
- Easy installation

1.5 Package Contents

Before you start the installation of the converter, please check the package contents.

- C-HDMI-COMPVGA x 1
- VGA to Component Y Adapter x1
- Power Adapter (+5VDC, 2A) x1
- User's Manual x1


1.6 Before Installation

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.

- Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
- Use the DC power adapter with correct specifications. If inappropriate power supply is used then it may cause a fire.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.


1.7 Panel Description

FRONT PANEL

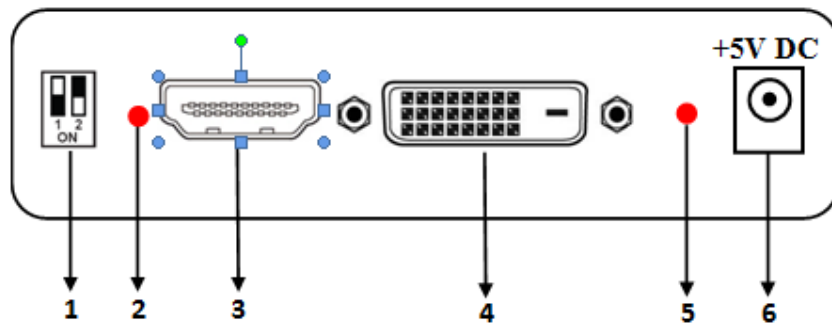

1. DIP Switch	2. HDMI / DVI Switch Button
3. HDMI Input	4. DVI Input
5. Power Indicator	6. Power Connector
DIP SWITCH	
1	ON: Learn EDID from VGA socket and save EDID to HDMI socket OFF: Write back the default EDID to HDMI socket
2	ON: Learn EDID from VGA socket and save EDID to DVI socket OFF: Write back the default EDID to DVI socket

REAR PANEL

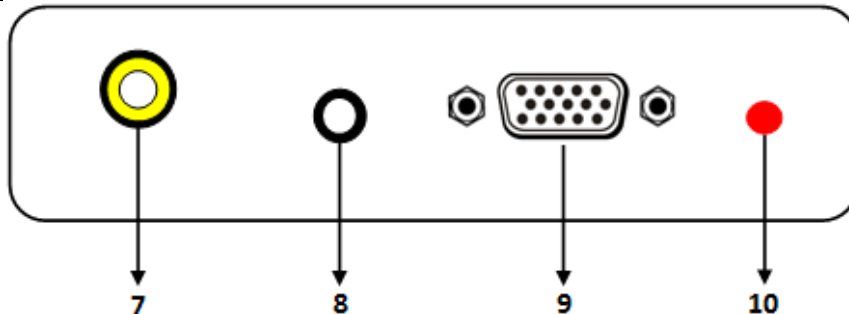

7. S/PDIF Output	8. Audio Output
9. VGA / Component Output	10. VGA / Component Switch Button



1.8 Installation

To setup Avenview C-HDMI-COMPVGA follow these steps for connecting to a device:

1. Power off display source such as DVD Player, Set-top box etc
2. Connect your HDMI and/or DVI source to HDMI input and/or DVI input
3. Connect S/PDIF or Stereo Audio source to RCA Jack or 3.5mm Jack
4. Connect VGA/Component Y cable to C-HDMI-COMPVGA
5. Connect other end of VGA/Component Y cable to VGA or Component input of display
6. Plug in 5V DC power cord to power jack of C-HDMI-COMPVGA
7. Power on C-HDMI-COMPVGA converter
8. Power on HDMI and/or DVI source and display with VGA or Component input.

S/PDIF format is dependent on the embedded digital audio part in the HDMI stream. The S/PDIF receiver must be able to recognize the input S/PDIF format. C-HDMI-DVIA only separates the digital audio in HDMI stream and bypasses this decoded audio to the output.

This version does NOT support 8 Channel analog audio applications

S/PDIF audio input can support 2 out of 8 channel audio inputs. S/PDIF audio only supports 48 KHz audio sample rate.

1.9 General Troubleshooting

Problem	Possible Solution
No Image	<ul style="list-style-type: none">• Check if connection to the source and the display are correct.• Ensure that display device supports 480p, 720p and 1080p resolution
Screen Defects Appear	<ul style="list-style-type: none">• This product supports up to 1080p (1920x1200) resolution.• Check the DVI and HDMI connection• If outputting from a PC. Check the maximum resolution range of the graphics card.

Section 2: Specifications

Item	Description
Video Bandwidth	165 MHz
Output Resolution	UXGA (1600x1200 / 1080p (1920x1080)
HDMI Connector	19 Pin type female connector
DVI Connector	DVI-I 29 pin female (digital only)
VGA Connector	15 pin female
RCA Connector	Coaxial S/PDIF (PCM 48k)
Earphone Jack	Analog Stereo Audio
Power Supply	5V DC
Power Consumption	6 Watts (max)
Dimension (L x W x H)	5" x 4" x 1.1"
Weight	425g (15oz)
<i>Environmental</i>	
Operation	0° to 50°C Degree

2.1 Supported Resolutions

2.1.1 VGA Resolution

VESA 640x400 @85Hz	VESA 1024x768 @60Hz	VESA 1280x960 @85Hz	1152x864@60Hz
VESA 720x400 @85Hz	VESA 1024x768 @75Hz	VESA 1280x1024 @60Hz	Mac 480-66A
VESA 640x480 @72Hz	VESA 1024x768 @85Hz	VESA 1280x1024 @85Hz	Mac 480-66B
VESA 640x480 @75Hz	VESA 1152x864 @60Hz	VESA 1360x768 @60Hz	Mac 600-66
VESA 640x480 @85Hz	VESA 1152x864 @75Hz	VESA 1440x900 @60Hz	Mac 768-60
VESA 800x600 @60Hz	VESA 1280x768 @60Hz	VESA 1400x1050 @60Hz	Mac 870-75
VESA 800x600 @72Hz	VESA 1280x768 @75Hz	VESA 1400x1050 @75Hz	IBM 6000
VESA 800x600 @75Hz	VESA 1280x768 @85Hz	VESA 1920x1200 @60Hz	NEC 1024-70
VESA 800x600 @85Hz	VESA 1280x960 @60Hz	VESA 1600x1200 @60Hz	SUN 1024-76

2.1.2 Component Video (YPbPr)

EIA 720x480p @59.94(60)Hz
EIA 720x576p @50Hz
EIA 1280x720p @59.94(60)Hz
EIA 1920x1080i @59.94(60)Hz
EIA 1920x1080p @59.94(60)Hz
712x484 (NTSC)
702x574 (PAL)



Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.